


## 10.2.4 Circuit Board Replacement, Continued

### K4LCN (51402755-100) LCN address selection

Figure 10-6 illustrates LCN node address selection on the K4LCN board, assembly 51402755-100. The pinning block, TS1, is located at coordinate 7A on the board. The absence of a jumper is a binary “1.” Parity must be an odd number.

Figure 10-6 K4LCN Board (51402755-100) LCN Node Address Selection

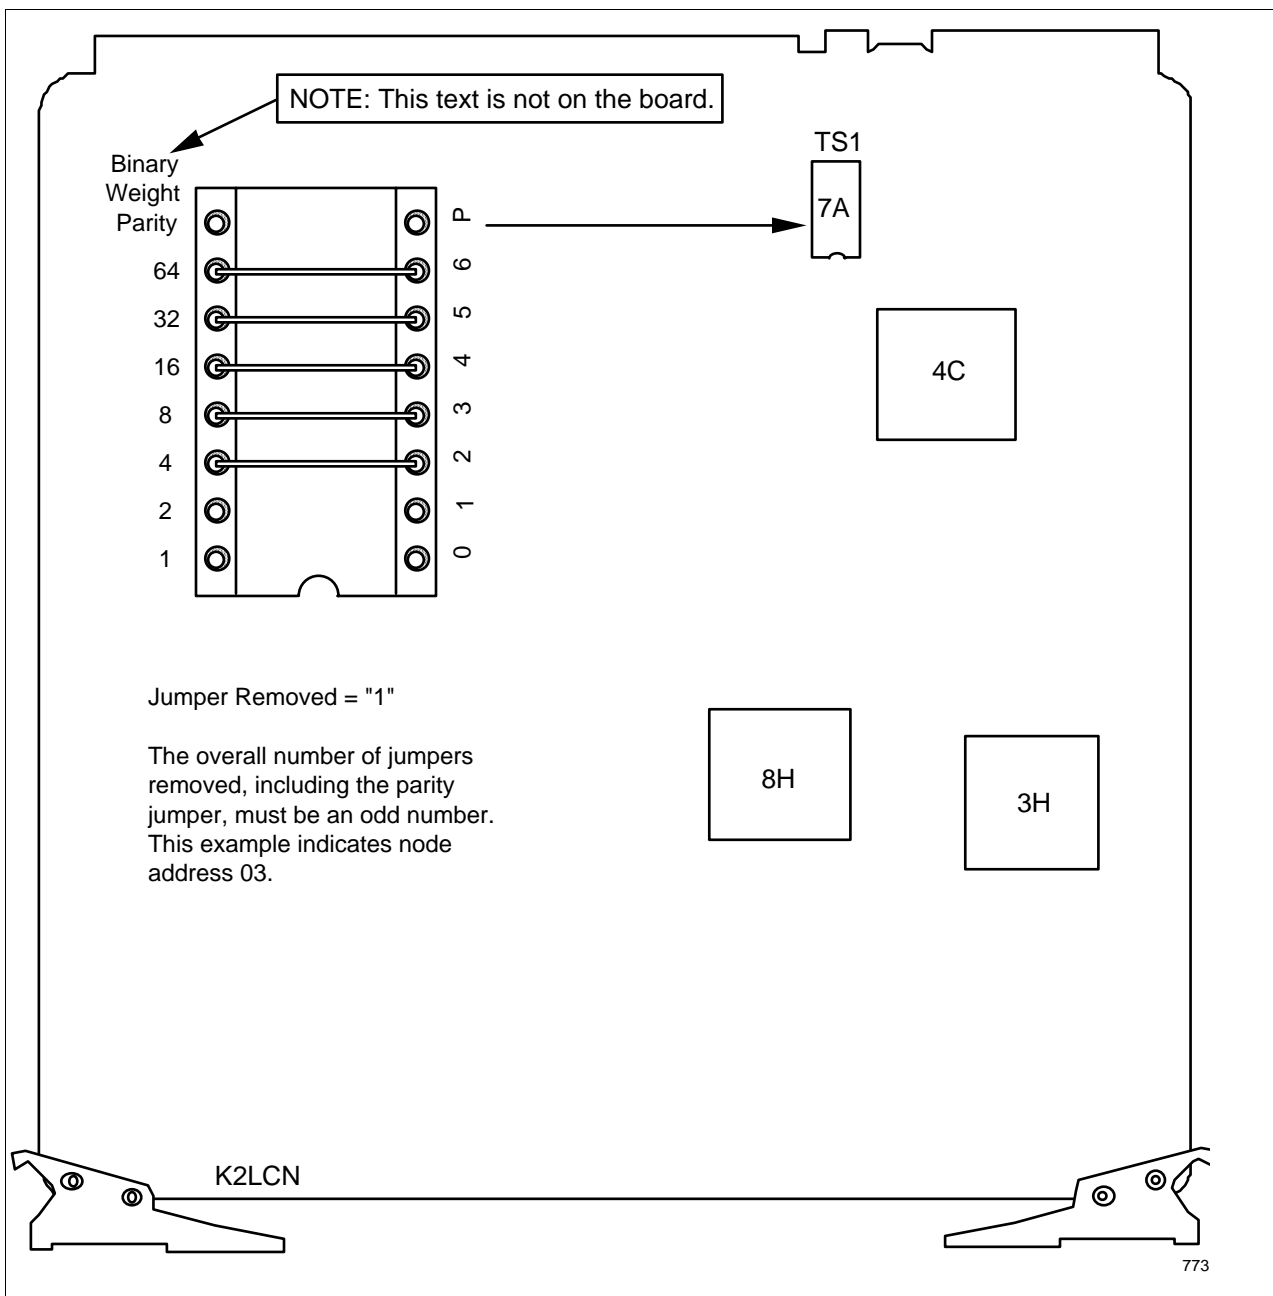


Continued on next page

## 11.2.4 Circuit Board Replacement, Continued

### K4LCN (51402755-100) LCN address selection

Figure 11-6 illustrates LCN node address selection on the K4LCN board, assembly 51402755-100. The pinning block, TS1, is located at coordinate 7A on the board. The absence of a jumper is a binary “1.” Parity must be an odd number.

Figure 11-6 K4LCN Board (51402755-100) LCN Node Address Selection

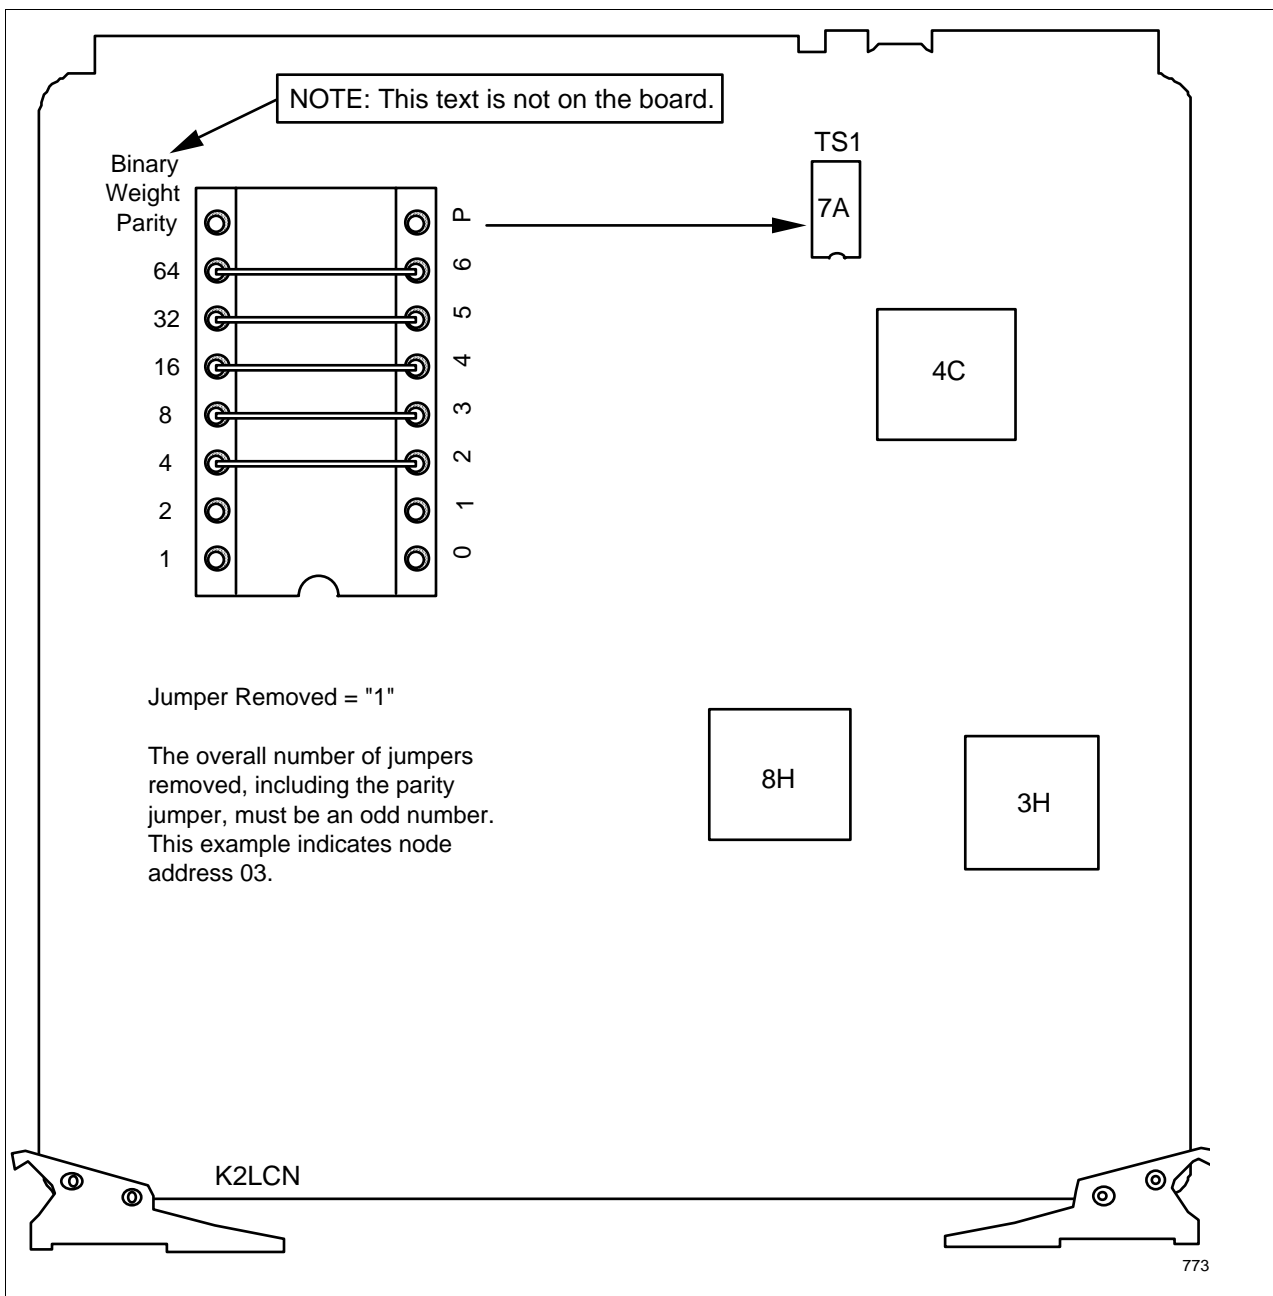

Continued on next page